

Tweed Valley Floodplain Risk Management Study

DRAFT FOR ADOPTION

Part 3 Habitable Land Use on the Floodplain

December 2007

TWEED SHIRE COUNCIL Engineering & Operations Division

Phone: (02) 6670 2400 Fax: (02) 6672 7513

The Study is on the web at: www.tweed.nsw.gov.au



3.0			General	Л
J.U	3.1		ojectives	
	3.2		ructure	
	3.3		ope	
	3.4		reed Valley Floodplain Risk Management Study Framework	
	3.5		isting Policies and Planning Controls	
	3.5		NSW Floodplain Development Manual 2005	
	3.5	5.2	Section 117 Ministerial Directions	
	3.5	5.3	Guideline on Development Controls on Low Flood Risk Areas	
	3.5	5.4	Tweed Local Environmental Plan 2000	
	3.5 Flo		Tweed Shire Development Control Plan, Section A3 – Developmer iable Land	
SEC	TION	Α	Strategic Land Use Issues	10
	3.6	Ob	jectives	10
	3.7	Dra	aft TLEP Amendment	10
	3.7	7.1	Background	10
	3.7	7.2	Clause 34 Amendment	10
	3.8 Habit		sessment Criteria for TLEP Amendments that Facilitate Additional Land Use on the Floodplain	11
	3.8	3.1	TLEP Amendment Assessment Criteria Options Analysis	12
	3.8	3.2	Preferred TLEP Amendment Assessment Criteria	13
SEC	TION		Development Control of Habitable Land Use on the Floodplain	
	3.9	Ba	ckground	
	3.9		Objectives	
	3.10		ood Risks for Land Use Classes	
	3.11		ood Management Options To Control Flood Risk	
	3.12	De	velopment Controls	
	_	2.1	Development Control Options Analysis	
	3.1	2.2	Preferred Development Control Options	17
3 13			Recommended Preferred Ontions	21

APPENDICES

Appendix A - Glossary	22
Appendix B - Policy Extracts	24
Appendix C - Options Analysis for Assessment Criteria for TLEP Amendments.	29
Appendix D - Options Analysis for Habitable Land Use Development Controls	33

Tweed Valley Floodplain Risk Management Study, DRAFT Part 3 Habitable Land Use on the Floodplain

3.0 General

Part 3 of the Floodplain Risk Management Study examines existing policy and planning controls for habitable land use on the floodplain. The study considers development techniques used to reduce flood risk for different community profiles and discusses emergency responses to flooding. This study identifies options for habitable development of flood prone land to reduce flooding risk for different land uses.

3.1 Objectives

The objectives of Part 3 of the Tweed Valley Floodplain Risk Management Study are to:

- Assess existing policies and planning controls applying to habitable land use on the floodplain;
- Examine options to amend the Tweed Local Environment Plan 2000 (TLEP) to reflect policy contained within the NSW Floodplain Development Manual 2005 (FPDM);
- Identify options for guidelines to allow Council to assess applications to amend the TLEP that would facilitate additional habitable development on the floodplain;
- Identify and assess options for assessment criteria and development control
 measures for habitable land uses on the floodplain to ensure practical provision
 for emergency response and protection of life for occupants for all floods up to
 the Probable Maximum Flood (PMF) level.
- Recommend preferred options for inclusion in Council's Flood Risk Management Policy.

Council is required by the FPDM to consider floods greater than the flood planning level (FPL) for habitable land use, up to the PMF level in its risk management process. This Part 3 Risk Management Study examines the safety of occupants of habitable developments for this full range of flood events.

3.2 Structure

The study will address these issues in the following context:

Section A Strategic Land Use Issues

- Need for specific floodplain management clauses in TLEP.
- Matters to be considered when assessing proposals to amend the TLEP to permit additional areas to be used for habitable purposes on flood prone land (e.g. amendments to land use tables, rezoning applications).

Section B Development Controls

 Development standards or prohibitions required to control habitable land uses on flood prone land to ensure practical emergency response to flooding.

3.3 Scope

Part 3 of the Floodplain Risk Management Study applies to all flood prone land in the Tweed Shire, including the Coastal Creek Floodplains (Cudgen, Cudgera and Mooball Creeks), with implementation of its outcomes not limited to the Tweed Valley Floodplain.

3.4 Tweed Valley Floodplain Risk Management Study Framework

Council resolved at its meeting of 7 September 2005 that the Tweed Valley Floodplain Risk Management Study be prepared in separable priority parts. This enables, where possible, priority localities and land use issues to be dealt with earlier in the process than would be possible with a single large study that would take a number of years to complete, without sacrificing the rigour of the project.

Based on recent issues that have come before Council, the following separable "Floodplain Risk Management Studies" were included in a priority list:

Table 1 - Separable Parts of Tweed Valley Floodplain Risk Management Study 2005

Part	Title	Description	Status
1	Establish Appropriate Flood Planning Levels for Residential Development	Establish appropriate Flood Planning Levels having regard to the findings of the Flood Study	Completed
2	Planning Controls For High Flow Areas	Examine options for appropriate development controls for high flow areas of the floodplain, identified in the flood study. These controls should be those necessary to minimise the cumulative impacts of developments that have the potential to restrict flood flows and adversely impact on the flooding of other properties.	Completed
3	Habitable Land Use On The Floodplain	Examine options for development control measures for subdivisions and other habitable uses on the floodplain to ensure there is practical provision for emergency evacuation, particularly in large floods up to the PMF level.	Current
4	Enclosures Below Flood Planning Level	Examine options for allowable development beneath elevated dwellings on the floodplain and associated ancillary buildings and structures.	Future
5	S149 certificates	Provision of flood information on s149 certificates, particularly with regard to the flood plain being defined as the inundated area in the PMF	Future
6	Chinderah and West Kingscliff Floodplain Management	Examine options for Floodplain Management of the Chinderah and West Kingscliff areas	Future

Part	Title	Description	Status
7	Large Developments and Rezoning Within The Floodplain	Examine options for assessment procedures and acceptance criteria for large development and rezoning proposals in the floodplain. Particularly regarding the cumulative impacts to be included in assessment, ranking of competing proposals where there are unacceptable combined/cumulative impacts and emergency evacuation needs for larger events up to the PMF.	Future
8	Review of Murwillumbah Floodplain Management Plan	Recommendation of Part 2 - Update Plan having regard to the findings of the Tweed Valley Flood Study 2005 and preceding parts of the Risk management Study	Future

Council is considering combining this approach of undertaking separable priority parts of the risk management study with an overarching consultancy to complete a holistic and complete floodplain risk management study in accordance with the FPDM. Progressive implementation of the outcomes of each part or stage of the study remains integral to Council's floodplain risk management process.

3.5 Existing Policies and Planning Controls

Refer to Appendix B for Policy Extracts.

3.5.1 NSW Floodplain Development Manual 2005

The NSW Floodplain Development Manual 2005 (FPDM) provides the policy framework for Council's local flood related policies and planning controls and enacts the NSW Government's Flood Prone Land Policy.

The FPDM outlines Council's requirements in reducing the impact of flooding by using a merit based risk management approach to sustainable development that identifies flood mitigation techniques and emergency management measures. (FPDM Section 1.1.1)

The FPDM acknowledges that it is reasonable for Councils to determine development limits, up to and including the exclusion of development within the floodplain, based upon an understanding of flood behaviour and emergency response as a method of reducing risk. (FPDM Section G6.2)

Development within the floodplain is considered acceptable if the perceived risk from flooding behaviour can be mitigated through the selection of appropriate flood risk control measures for the development types, without creating unacceptable cumulative impacts on flood behaviour or floodplain ecosystems. (FPDM Section G6.3)

While the PMF is unlikely to be adopted as a flood planning level (FPL), a continuing risk to personal safety from floods exceeding the FPL remains, and needs to be managed through emergency response and community education. (FPDM Section G7.1.2)

Although emergency planning and education is appropriate from a flood response perspective, these methods cannot be relied upon to provide a permanent reduction in flood risk. Should education programs lapse and emergency response be lacking or under resourced, communities relying upon these methods may be adversely

impacted. As such, planned and engineered controls to provide permanent measures to reduce flood risk to a community are supported by the FPDM. (FPDM L6.8)

3.5.2 Section 117 Ministerial Directions

On 30 September 2005, the NSW Government Department of Planning issued Section 117 Ministerial Directions, under the Environmental Planning & Assessment Act 1979. Direction No.15 applies to Flood Prone Land.

The objectives of this Direction are:

- To ensure that development of flood prone land is consistent with the NSW Government's Flood Prone Land Policy and the principles of the Floodplain Development Manual, 2005.
- To ensure that the provisions of an LEP on flood prone land is commensurate with flood hazard and includes consideration of the potential flood impacts both on and off the subject land.

This Direction applies when Council prepares a draft LEP that creates, removes or alters a zone or provision that affects flood prone land.

According to this Direction, a draft LEP shall not rezone land within the flood planning areas from Special Area, Recreation, Rural or Environmental Protection Zones to a Residential, Business, Industrial or Special Area Zone, unless Council can satisfy the Director-General that the rezoning is in accordance with a floodplain risk management plan prepared in accordance with the principles and guidelines of the FPDM.

3.5.3 Guideline on Development Controls on Low Flood Risk Areas

Planning Circular PS07-003 "New Guideline and Changes to Section 117 Direction and EP&A Regulation on Flood Prone Land" was issued by the NSW Government Department of Planning on 31 January 2007. This circular provides advice on a package of changes concerning flood-related development controls on residential development on land above the residential flood planning level (1 in 100 year flood level plus 0.5m freeboard in the Tweed Valley) and up to the PMF, referred to in some constituencies as "low-risk flood areas".

This package consists of

- an amendment to the EP&A Regulation 2000 (concerning Section 149 planning certificates for properties in "low-risk flood areas")
- a new "Guideline on Development Controls on Low Flood Risk Areas", to be read in conjunction with the Floodplain Development Manual
- a revised Section 117 Ministerial Direction (referencing the Guideline's requirements for draft LEPs, development controls and flood planning levels for "low-risk flood areas"), and
- a notice under s733 Local Government Act 1993 that extends the definition of the Manual to include the Guideline in matters of legal indemnity for Councils.

The Guideline confirms that unless there are exceptional circumstances, the 100 year ARI flood level (plus freeboard) should be adopted as the flood planning level for residential development, to reduce the frequency of exposure of people and property to flood risk and the associated danger and damage.

The Guideline goes on to state that unless there are exceptional circumstances, Councils should not impose flood related development controls on residential development on land above the residential FPL.

The Guideline does acknowledge that consideration of the safety of people and associated emergency response management may result in controls to be applied to critical infrastructure and response facilities (major utilities, hospitals and evacuation routes etc) and vulnerable developments (aged care facilities etc) in areas above the 100 year ARI flood.

Variations to the Guideline require the concurrence of Department of Environment and Climate Change (DECC) and Department of Planning (DoP) prior to their implementation in an LEP or DCP.

3.5.4 Tweed Local Environmental Plan 2000

The Tweed LEP 2000 (TLEP) principally addresses flooding issues in Clause 34. Clause 34 is limited and out of date to the extent that it does not adequately implement Section 117 Ministerial Direction No.15, requiring consistency with the NSW Government's Flood Prone Land Policy and the FPDM.

Specifically it does not:

- Prioritise the protection of human life as the overriding principle
- Limit use of the floodplain commensurate with the flooding risk and land use type
- Require the existing flood regime to be maintained

3.5.5 Tweed Shire Development Control Plan, Section A3 – Development of Flood Liable Land

The aims of Section A3 of the Tweed Shire Development Control Plan are to:

- Present Council's Flood Mitigation Strategy; and
- Set detailed standards for land development in order to minimise the adverse effect of flooding on the community
- Progressively implement the provisions of the FPDM
- Implement completed Parts of the Tweed Valley Floodplain Risk Management Plan.

The DCP requires all habitable areas of new development be built to a minimum floor level (ARI 100 year flood level plus freeboard). To date there has been little or no consideration of evacuation or the consequences of larger floods in the DCP. Such planning controls have resulted in the proliferation of residential developments on "low islands", with inherent flood emergency response limitations.

A recent review of the Tweed Local Flood Plan by the NSW State Emergency Service (SES) attempts to quantify the extent of the existing emergency response problems that face Tweed Shire in a major flood, via a risk analysis process. The outcomes of this risk analysis were the subject of an interim report to Council in July 2006, and are summarised as follows:

- Up to 28,000 people would be affected by the 100 year ARI flood, either by the inundation of their homes, or by isolation due to flood waters.
- Up to 13,000 of these people would require the assistance of emergency services to evacuate.
- Approximately 450 "critical care" patients in various flood liable facilities would require evacuation in the 100 year ARI event.
- Flood warning times can be as little as 6 hours under certain conditions, which does not allow adequate evacuation time for this many evacuees.
- The SES is not currently resourced with enough staff or flood boats to undertake an evacuation of this magnitude.

As the development approval authority, Council has a responsibility to ensure that new subdivisions and infill development provides long term contingencies for emergency response in floods up to the PMF without undue reliance on emergency services, by mandating suitable measures in the DCP.

3.5.6 Flood Risk Management Policy

As stated in Section 3.4, the progressive implementation of the recommended outcomes from the floodplain risk management study is integral to Council's floodplain risk management process. Council is obliged to continue to control floodplain development during the floodplain management process, to duly consider new information on flooding behaviour, changes in Council's development strategies, other planning reforms, and continuing development pressures on flood prone land.

Council has prepared a local flood risk management policy in accordance with Sections C9 and I6 of the FPDM. It is intended that the recommended outcomes of the flood risk management study shall be implemented in the policy as appropriate, pending completion of the study and Tweed Valley Floodplain Risk Management Plan.

SECTION A Strategic Land Use Issues

3.6 Objectives

The objectives of this section are to:

- Address the deficiencies in the current TLEP Provisions (Clause 34) with respect to flooding by recommending a draft TLEP amendment (refer Section 3.7); and
- Determine assessment criteria to be used for applications to amend the TLEP that facilitate additional habitable land use on the floodplain (refer Section 3.8).

3.7 Draft TLEP Amendment

3.7.1 Background

In June 2005 the NSW Parliament assented to the *Environmental Planning and Assessment Amendment (Infrastructure and Other Planning Reform) Act 2005* (the Reform Act). The Reform Act contains a number of new provisions that together require the preparation of new local environmental plans (LEPs) across NSW that are more consistent in format and content. (Department of Planning, Planning Circular PS05-008)

The Standard Instrument (Local Environment Plans) Order 2006 prescribes a standard form and content of a principal LEP for the purposes of Section 33(a) of the Environment and Planning Assessment Act 1979. (DoP Planning Circular PS06-008)

In addition to mandatory provisions, local provisions may be incorporated into the standard instrument. Local provisions may be prepared by councils to address matters that are relevant to their local area and which are not covered by provisions in the standard instrument. This may include issues that are the subject of state or regional planning guidance requiring councils to develop tailored provisions that are appropriate to their local area, e.g. developing flood planning provisions using the NSW Floodplain Development Manual (FPDM). (DoP Planning Circular PS06-008)

Section 117 Ministerial Direction No.15 - Flood Prone Land requires consistency with the NSW Government's Flood Prone Land Policy and the FPDM. The primary objectives of the NSW Flood Prone Land Policy and the FPDM is to

- Reduce the impact of flooding and flood liability on individual owners and occupiers of flood prone property; and to
- Reduce private and public losses resulting from floods, while not unnecessarily precluding development from the floodplain (FPDM Section 1.1.1).

3.7.2 Clause 34 Amendment

It is proposed that the following draft clause, based on the Draft LEP Template of 20 September 2005 (underlined text is additional), be incorporated into an amendment of the Tweed LEP to replace and address the deficiencies of current Clause 34 of the LEP.

"Development on flood prone land

- (1) The objectives of this clause are:
 - (a) to maintain the existing flood regime and flow conveyance capacity, and
 - (b) to enable safe occupation of flood prone land; and
 - (c) to avoid significant adverse impacts upon flood behaviour; and
 - (d) to avoid significant adverse affects on the floodplain environment that would cause avoidable erosion, siltation, destruction of riparian vegetation or a reduction in the stability of the river bank/watercourse; and
 - (e) to limit uses to those compatible with flow conveyance function and flood hazard.
- (2) This clause applies to land shown as flood prone land <u>in maps</u>, <u>flood studies</u> and/or floodplain management plans.
- (3) Development consent is required for the following:
 - (a) subdivision of land,
 - (b) filling and earthworks,
 - (c) the erection of a building,
 - (d) the carrying out of a work,
 - (e) flood mitigation works,
 - on land to which this clause applies (but excluding works covered by Clause xxx of this plan).
- (4) Consent required by subclause (3) must not be granted unless the consent authority is satisfied that the development:
 - (a) <u>when assessed on both an individual and cumulative basis</u>, will not adversely affect flood behaviour resulting in detrimental increases in the potential flood affectation of other development or properties; and
 - (b) when assessed on both an individual and cumulative basis, will not significantly alter flow distributions and velocities to the detriment of other properties or the environment of the floodplain; and
 - (c) will enable safe occupation of the flood prone land; and
 - (d) <u>when assessed on both an individual and cumulative basis</u>, will not significantly detrimentally affect the floodplain environment or cause avoidable erosion, siltation, destruction of riparian vegetation or a reduction in the stability of the riverbank/watercourse; and
 - (e) when assessed on both an individual and cumulative basis, will not be likely to result in unsustainable social and economic costs to the flood affected community or general community, as a consequence of flooding; and
 - (f) when assessed on both an individual and cumulative basis, is compatible with the flow conveyance function of the floodway; and
 - (g) when assessed on both an individual and cumulative basis, is compatible with the flood hazard within the floodway; and
 - (h) will not significantly increase the requirement for emergency services in times of flood."

3.8 Assessment Criteria for TLEP Amendments that Facilitate Additional Habitable Land Use on the Floodplain

Section 54 of The Environmental Planning and Assessment Act (1979) states that "a council may decide to prepare a draft local environmental plan...". From time to time

Council receives requests to prepare draft LEPs to increase the range of permissible habitable land uses on flood prone land. Applications may take the following form:

- Rezoning land via amendments to Zoning Maps, and/or
- Amendments to Land Use Tables, and/or
- Amendments to Local Provisions

Direction Number 15 – Flood Prone Land requires councils to ensure development of flood prone land is consistent with the NSW Government's Flood Prone Land Policy and that any development considers flood hazards (risks) and any potential flood impacts the development may have. (Section 117 Ministerial Direction)

It is considered necessary that Council adopts criteria in this part of the Floodplain Risk Management Plan that would eliminate further consideration of such requests where they would result in permitting development where the safe occupation/ evacuation of these developments in flood events could not be ensured. That is, to provide flood related "exclusion criteria" for unacceptable applications to amend the TLEP that facilitate additional habitable uses on the floodplain.

Applications to amend the TLEP that permit habitable uses or intensified residential development on the floodplain should be assessed on the basis of the topographic characteristics of the subject land in relation to the design flood level (the 100 year ARI flood level for residential development) and the probable maximum flood (PMF) level.



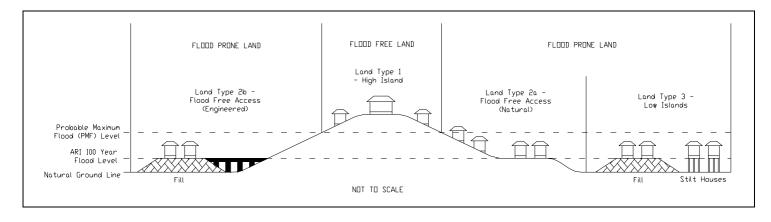


Figure 1 Land Classification

3.8.1 TLEP Amendment Assessment Criteria Options Analysis

Based on the land types in Figure 1, the applicable risk management responses for residents in a flood emergency have been assessed, with regard to floods up to the PMF. Refer to Appendix C for detailed analysis of options for assessment criteria for applications to amend the TLEP that facilitate additional habitable land use on the floodplain.

3.8.2 Preferred TLEP Amendment Assessment Criteria

Based on the options analysis in Appendix C, Table 2 summarises the preferred assessment criteria for such TLEP amendments.

Table 2 Preferred Assessment Criteria for TLEP Amendments that Facilitate Additional Habitable Land Use on the Floodplain

Land Classification	Description	Risk Management Approach	Comments	Is Application Acceptable for Further Consideration?
Land Type 1 - High Islands	Land is above PMF level	Shelter in Place - Flood Free Refuge	Residents remain in situ for duration of the flood emergency. High islands may or may not be serviced by critical infrastructure such as hospitals.	Yes
Land Type 2a - Flood Free Access (Natural)	Topography naturally grades to land that is above PMF level	Evacuation	Residents relocate to flood free areas as flood levels rise above design flood level for local roads and dwellings. Evacuation efficiency is dependent upon mode of transport (road or pedestrian evacuation), services available at the destination (evacuation centre, medical facilities), and ability of residents to travel (aged, infirmed, disabled, young children).	Yes
Land Type 2b - Flood Free Access (Engineered)	Land is linked to land above PMF level by fill, roads, bridges and the like	Evacuation	As for 2a	Yes
Land Type 3 - Low Islands	Land and dwellings are constructed at design flood level but below PMF level, with no flood free access to land above PMF level	Rescue	Relies on emergency services to remove residents from the flood risk for events that cut local access routes. This is contrary to the TLEP and the FPDM and is not a valid risk management approach.	No

Table 2 provides criteria for the exclusion of TLEP amendment proposals that contain unacceptable flooding risks to human life. Applications that pass this test and are eligible for further consideration will still be required to deal with other flood related risks (e.g. impact on flood behaviour, floodplain environment or flood conveyance function) in accordance with Council's Flood Risk Management Policy, DCP Section A3, and Floodplain Risk Management Study, as well as non-flood related planning issues.

SECTION B Development Control of Habitable Land Use on the Floodplain

3.9 Background

Development controls are necessary to ensure compliance of new floodplain development with the following key issues from the Floodplain Development Manual:

- Safety of people
- Management of the potential damage to property and infrastructure
- Management of the cumulative impacts of development, and
- Impact on Emergency Services

Development control options identified in this section of the study limit the type of development allowed within a specified land zoning according to the land use risk class of the development (refer Section 3.10) and the flood risk management option proposed (refer Section 3.11).

3.9.1 Objectives

The objectives of this section are as follows:

- To make the protection of human life a major consideration for habitable development within the floodplain.
- To promote development of flood prone land in accordance with the FPDM and not sterilise the floodplain by unnecessary prohibition of development
- To provide acceptance criteria / development controls to allow the assessment of development applications on a merit basis taking into account the social, environmental and economic factors associated with flooding.

The following examination of assessment criteria for floodplain development only deals with the occupation risk of development on flood prone land. A development application must address other flood related risks (e.g. impact on flood behaviour, floodplain environment or flood conveyance function), as well as non-flood related planning issues.

For example, this study does not consider controls on filling of allotments. This is currently specified in the DCP, and will be considered in more detail in a later part of the Floodplain Risk Management Study.

3.10 Flood Risks for Land Use Classes

Table 3 considers four habitable land use types in the context of the FPDM and discusses flooding risks associated with the function and demographic of the land use type.

Table 3 Land Use Risk Classes

Land Use Risk	Development Types	Risk Analysis
Class		,
(a) Critical Infrastructure and Emergency Response Facilities	As per Appendix K3.1 of the FPDM - Police and ambulance stations, hospitals, SES headquarters, evacuation centres and civil infrastructure such as major telephone exchanges and power sub-stations.	Critical Infrastructure and Emergency Response Facilities are the essential services necessary to maintain law and order and essential and emergency services during flood events. Critical facilities must have maximum protection from flood, as they are required to remain operational during floods to provide these emergency response functions. Such facilities need to remain accessible to as large a part of the community as possible. Section K3.1 of the FPDM states that consideration should also be given for the PMF to be used as the FPL when siting and developing emergency response facilities and critical infrastructure.
(b) Sensitive Uses	Housing (including group homes) and residential care facilities for seniors and disabled persons.	Sensitive use developments are those facilities that provide accommodation and/or residential care to persons with impaired or vulnerable mental and physical health. This population may be limited in mobility and may have high care needs requiring constant supervision and specialised staff, access to services and transport. Any evacuation destination needs to be adequately accessible and equipped to accommodate high needs patients.
(c) Medium and High Density Accommodation	Multi dwelling housing, dual occupancy, residential accommodation, residential flat building, backpackers' accommodation, boarding house, hostel, hotel accommodation, moveable dwelling, caravan park, serviced apartment, tourist and visitor accommodation, and accommodation associated with an educational establishment	Medium and high-density accommodation would typically be urban or rural residential infill development but also includes short term and tourist accommodation. Residents typically have a mix of mobility capability and most are assumed to be able to evacuate unassisted. Density of the development may influence the risk profile as higher numbers place higher demands on emergency services if evacuation or re-supply during a flood is required.
(d) Residential Subdivision and Development	Urban Residential Subdivision (including small lot rural subdivision) Urban Residential Dwellings Rural Subdivision Rural Residential Dwellings	Subdivision of land which involves the creation of new allotments with potential for further residential development. Greenfield residential subdivision is unique in being able to implement best practice urban planning on green field sites to reduce flooding risk at the design phase. The NSW SES has identified provision for unassisted evacuation during an extreme flooding event as the primary flood risk option. The options for infill subdivisions in already established areas are much more constrained by existing roads and ground levels.

3.11 Flood Management Options to Control Flood Risk

A development could employ one or more of the following management approaches to reduce the ongoing risk of flood. Table 4 describes how a hierarchy of flood risk management options can be related to development controls used to reduce the risk of flooding.

Table 4 Flood Risk Management Options

Risk Management Hierarchy	Risk Management Approach	Risk Analysis
AVOIDANCE	Mandate development to be above the PMF level, on flood free land.	Provides maximum protection to development. Will result in isolation from other sections of the community below PMF level. Sterilises flood prone land from development.
EVACUATION	Mandate development to have natural or engineered access to land above the PMF level for unassisted relocation of occupants above flood level.	May utilise vehicular or pedestrian evacuation to high land (depending on development type), without reliance on emergency services. May be constrained by existing development pattern and topography in the locality, and distance to and service level (including medical services) of the evacuation destination. Reliant upon effective early warning systems, community education, and the ability of most of the community to evacuate unassisted (including aged, disabled, infirmed and young children).
SHELTER IN PLACE	Development is required to have a habitable refuge capable of accommodating and servicing the needs of insitu occupants above the PMF level so that they can "wait out" the flood event for its duration.	Does not unnecessarily sterilise land from urban infill development, allowing unconstrained development provided it has a serviced PMF refuge. Emergency services may still be required for re-supply and for emergency (eg. medical) evacuations. May be constrained by planning restrictions (e.g. building heights, impacts on neighbours) in some areas. Difficult to ensure that reliable and appropriate long term emergency provisions are maintained by owners and understood by occupants.
RESCUE	No habitable areas within the development are located above the PMF level and occupants require rescue by emergency services to relocate them to land above PMF level.	Reliance on emergency services to rescue at risk occupants is inappropriate given the risk to occupants and rescue personnel. This is consistent with NSW SES recommendations and the FPDM. Rescue is not considered an appropriate risk management option.

3.12 Development Controls

Currently Section A3 of the DCP prescribes Flood Planning Levels (FPLs) and development controls for flood liable land, however these controls focus simply on property protection up to the FPL. The FPDM requires the consideration of larger floods up to the PMF, and the protection of life for occupants of new developments as a priority for floodplain risk management.

Combining the Land Use Risk Classes in Table 3 with the Flood Risk Management Options in Table 4 provides a range of Development Control Options that may be applied to habitable floodplain development. These Development Controls are needed to manage the risk of flooding to people and property without unnecessarily sterilising the floodplain from development.

The following development control options are not locality specific and are not intended to address all aspects of floodplain development, such as flood planning levels, filling requirements, building materials, restriction to flood flows, and the cumulative impact of development. The following development controls should be read in conjunction with the current clauses in Section A3 of the DCP, TLEP, Flood Risk Management Policy, and all current and future parts of the Tweed Valley Floodplain Risk Management Study.

3.12.1 Development Control Options Analysis

Refer Appendix D for detailed analysis of Development Control Options for habitable land use on the floodplain.

3.12.2 Preferred Development Control Options

Based on the Options Analysis in Appendix D, Table 5 summarises the Preferred Development Control Options identified for each Land Use Risk Class as follows:

Table 5 Preferred Development Control Options

Land Use Risk Class	Development	Preferred Options	Notes
	Туре		
(a) Critical Infrastructure and Emergency Response Facilities	New Development	Mandate all new critical infrastructure and facilities to be located above PMF level, unless exceptional circumstances can be justified, such as servicing existing flood prone communities where no practical alternative exists. In such cases, adequate PMF	Note 1
		refuge must be provided.	
	Existing Development	Permit minor expansion of existing facilities without consideration of PMF. Major expansion below PMF level subject to provision of adequate PMF refuge.	Note 1
(b) Sensitive Uses	New Development	Mandate all new sensitive development to have permanent high level road evacuation route(s) to land above PMF level and/or adequate PMF refuge, subject to the recommendations of an acceptable Flood Response Assessment Plan.	Note 2
	Existing Development	Permit minor expansion of existing facilities without consideration of PMF. Major expansion below PMF	Note 1

Land Use Risk Class	Development Type	Preferred Options	Notes
	- 77	level subject to provision of adequate PMF refuge.	
(c) Medium and High Density Accommodation	New Development (except moveable dwellings, caravan parks)	Mandate all new high/medium density development to have permanent high level road evacuation route(s) to land above PMF level and/or adequate PMF refuge, subject to the recommendations of an acceptable Flood Response Assessment Plan.	Note 3
	Existing Development (except moveable dwellings, caravan parks)	Permit minor expansion of existing facilities without consideration of PMF. Major expansion below PMF level subject to provision of adequate PMF refuge.	Note 4
	New Development (moveable dwellings, caravan parks)	Mandate all new caravan/moveable dwelling parks to have permanent high level road evacuation route(s) to land above PMF level.	
	Existing Development (moveable dwellings, caravan parks)	No expansion of existing facilities permitted, unless permanent high level road evacuation route to high land external to the site is available, or high land internal to the site can be accessed by the additional sites via high level road and/or pedestrian routes.	
(d) Residential Subdivision and Development	New Subdivisions	Mandate all new subdivisions to have high level road evacuation route(s) to land above PMF level, accessible to all allotments via (as a minimum) flood free pedestrian accesses not exceeding 100m in length.	
	Infill Subdivisions	Permit infill subdivision subject to the creation of covenants on land titles of all new allotments that cannot achieve suitable high level road/pedestrian evacuation route(s) to land above PMF level, requiring adequate PMF refuges in all future dwellings.	Note 4
	New Single Dwellings	Mandate adequate PMF refuges in all new dwellings on existing allotments that are located below PMF level and that are without suitable high level road/pedestrian evacuation route(s) to land above PMF level, unless that land is protected by a 1 in 100 year levee (Murwillumbah CBD, East Murwillumbah, Dorothy/William Street).	Note 4
	Existing Single Dwellings	Minor extensions to existing dwellings permitted without consideration of the PMF. Dwellings undergoing major extensions must meet new single dwelling criteria.	Note 4
(e) General	All	Flood Response Assessment Plans are required to be submitted with Development Applications for all habitable land uses in the floodplain.	Note 5

Note 1 - PMF Refuge for Critical and Sensitive Development

The PMF refuge must meet the following minimum requirements:

- Refuge must be above the PMF level.
- Minimum floor level to be PMF level. No freeboard required.
- For new facilities, minimum floor area of refuge to be no less than 50% of the total floor area located below the PMF, or an equivalent area that would comfortably accommodate and service the needs of the occupants for a period not less than one week. For extensions to new facilities, minimum floor area of refuge to be no less than 50% of the incremental increase in total floor area located below the PMF due to the extension.
- Refuge must comply with Building Code Australia requirements, with external components rated appropriately for storm, wind and moisture.
- Permanent internal access via permanent staircase, minimum 1.2m wide.
- External access to the refuge must also be provided. Access must remain unobstructed for emergency boat access during flooding (i.e. clear of trees, services).
- Refuge must have natural lighting and ventilation.
- Support structures below PMF level must be capable of withstanding flood forces (water flow, debris impact, and buoyancy) and continuous submergence for up to one week, requiring an engineering certification.
- Refuge must meet all planning and building controls applicable to the site.
- All services provided as part of normal operations are to be continued undiminished during all
 flood events. This includes food, water, shelter, power via back up generators, medical services
 and hygiene of residents and facilities. All excess sewage, food and medical waste is to be
 collected and stored until such time as normal disposal can be undertaken. Facility management
 must make provision for staff to be rostered on and accommodated for the flood period. All such
 measures must be detailed in the development's Flood Response Assessment Plan.

Note 2 - Evacuation Versus Shelter in Place for Sensitive Development

Evacuation of occupants is the preferred risk management approach for sensitive developments proposed below PMF level. Adoption of evacuation as the risk management response for a development requires a Flood Response Assessment Plan that specifically addresses the following evacuation requirements:

- Typical demographics of evacuees (age, gender etc)
- Typical medical conditions and/or disabilities of evacuees (dialysis, dementia, paralysis etc)
- Mode of transportation (private bus, ambulance etc)
- Intended evacuation destination
- Level of service provided by evacuation centre (medical, security, accommodation etc)
- Required staffing for evacuation centre to cater for evacuees
- Special supply measures for evacuation centre to cater for evacuees (food, water, waste, medicines etc)

If the above requirements are not able to be satisfied for all future occupants of the development, a PMF refuge shall be provided in accordance with design criteria in Note 1.

Note 3 - Evacuation Versus Shelter in Place for Medium and High Density Accommodation

Evacuation of occupants is the preferred risk management approach for medium and high density developments proposed below PMF level. Adoption of evacuation as the risk management response for a development requires a Flood Response Assessment Plan that specifically addresses the following evacuation requirements:

- Expected number of occupants/evacuees
- Typical demographics of evacuees (families with children, retirees etc)
- Mode of transportation (private vehicles, bus provided by facility etc)
- Intended evacuation destination
- Level of service provided by evacuation centre (medical, security, accommodation etc)
- Any special requirements for evacuation centre to cater for evacuees (food, water, waste, medicines etc)

If the above requirements are not able to be satisfied for all future occupants of the development, a PMF refuge shall be provided in accordance with design criteria in Note 4.

Note 4 - PMF Refuge for Urban and Rural Residential Development

Where PMF refuge is required, the refuge must meet the following minimum requirements:

- Refuge may be an additional second storey, mezzanine level or other raised refuge area above the PMF level.
- Minimum floor level to be PMF level. No freeboard required.
- Minimum floor area for a single bedroom dwelling 9m², add 4m² for each additional bedroom.
- For unit developments, may provide separate refuges within each unit, sized in accordance
 with the above bedroom ratio. Alternately provide a communal refuge, accessible internally by
 all units, floor area no less than 50% of total floor area located below PMF level, or an
 equivalent area that would comfortably accommodate and service the needs of the occupants
 for a period not less than one week.
- Refuge must comply with Building Code Australia requirements, with external components rated appropriately for storm, wind and moisture.
- Minimum 2.1m floor to ceiling/roof frame height.
- Refuge must be provided with permanent internal and external access, (may be a fixed ladder).
- The external access must be unobstructed (by trees, chimneys, aerials etc) for emergency boat access during flooding
- Refuge must have natural lighting and ventilation
- Support structures below PMF level must be capable of withstanding flood forces (water flow, debris impact, and buoyancy) and continuous submergence for up to one week, requiring an engineering certification.
- Refuge must meet all planning and building controls applicable to the site.
- Refuge must have a cupboard storage area for flood emergency kit to service all residents
 with provisions for isolation up to one week, consisting of food and fresh water supplies, first
 aid kit including medication, battery powered torch, portable radio, spare batteries, candles
 and water proof matches, plastic bags and rubber gloves. All such measures must be detailed
 in the development's Flood Response Assessment Plan.

Note 5 - Flood Response Assessment Plan

A Flood Response Assessment Plan provides a means by which a developer can assess and nominate the most applicable flood emergency response option for a habitable development (whether it be avoidance, evacuation, or shelter in place), and for Council officers to consider during assessment of the development application.

The Flood Response Plan is not intended to be a document that provides details for the site specific management of flood preparation and response for a habitable development. Such private flood plans should be developed and implemented by owners and occupants following completion of the development. The Tweed Local Flood Plan and Floodsafe Toolkit on the SES website may assist in the preparation of private flood plans.

As a minimum requirement, a Flood Response Assessment Plan for a proposed development must provide the following details:

- Expected number of occupants
- Typical demographics of occupants (families with children, retirees etc)
- 100 year ARI flood level and PMF level for the development site (obtainable from Council)
- Nominated Flood Risk Management Approach for the development (avoidance, evacuation, shelter in place. Note that rescue is not an appropriate response for any development type)
- For evacuation, provide detail of nearest evacuation centre (as advised by the NSW State Emergency Service), the intended mode of transport to the centre, and indicative ground/road levels at significant points along the nominated evacuation route.
- Any special requirements for evacuation centre to cater for evacuees (food, water, waste, medicines etc)
- If shelter in place, provide details of refuge in accordance with Note 1 or Note 4 as applicable.

3.13 Recommended Preferred Options

Numerous recommendations have been made in the body of this study, having identified and assessed various options for strategic planning criteria and development assessment controls for habitable land uses on the floodplain.

These recommended preferred options will be exhibited as draft additions to the Flood Risk Management Policy.

Appendix A - Glossary

Average Recurrence Interval (ARI) - ARI is the long-term average number of years between the occurrence of a flood as big as (or larger than) the selected event.

Design Flood Level - Flood level selected as a basis of design in flood prone areas, as defined by Tweed Development Control Plan Section A3 - Development of Flood Liable Land.

Flood Planning Levels (FPLs) - Are the combinations of flood levels (typically derived from the 100 year ARI flood for habitable purposes) and freeboards selected for floodplain risk management purposes, as determined in management studies and incorporated in management plans.

Flood Prone Land (Flood Liable Land)- Land susceptible to flooding by the PMF event. Defines the extent of floodplains. Flood prone land is synonymous with flood liable land.

Habitable Area - A living or working area, such as a lounge room, living room, dining room, rumpus room, kitchen, bedroom, office or the like, and includes rooms constructed and furnished for these purposes. Rooms containing a bath and/or shower are considered habitable. Rooms containing a toilet or basin are not considered habitable if additional to a main bathroom.

Habitable Land Use - Development that facilitates the occupation or use of buildings or rooms by persons for accommodation. Includes residential accommodation; backpackers accommodation; bed & breakfast accommodation; boarding houses; dwellings; hostels; hotel accommodation; moveable dwellings; caravan parks; residential care facilities; seniors housing; services apartments; tourist and visitor accommodation; hospitals; accommodation, residences or dwellings associated with educational establishments.

High Island - A high island is an area above the PMF that is surrounded on its entire perimeter during a PMF event. A high island can either be a natural landform such as a high ridge (local examples are Terranora, Bilambil Heights and Hospital Hill in Murwillumbah); or can be created by raised dwellings, fill pads and upper storey refuges.

High Land - Land that is situated above PMF level.

High Level Evacuation Route - A road or footway (as applicable based on the development type), whose entire length has a level (measured at top of kerb for roads) of not less than the design flood level and, which provides a route to enable people to evacuate to land above the PMF. Ideally a high level evacuation route will have a rising grade that ensures users will not be cut off as floodwaters rise. Overland stormwater flow paths on high level evacuation routes must be designed to remain trafficable when conveying the 100 year ARI design stormwater flow. High level evacuation routes should have levels that in combination with effective warning time, development type and flood duration, provide adequate time for evacuation to land above the PMF.

Infill Subdivision - The subdivision of land less than 5 hectares in area, surrounded by existing urban development and/or constrained by the urban land form from further expansion.

Low Island - An area that is above the FPL and surrounded on its entire perimeter during and 100 year ARI event, but is inundated by the PMF. When flood levels exceed the FPL, in events up to the PMF, low islands become totally inundated, posing significant risk to isolated residents without flood free access to high land or shelter. Local examples include filled residential estates in Banora Point, West Kingscliff, and Pottsville, and raised dwellings in Chinderah, South Murwillumbah and Rural Villages.

Minor Extension or Expansion - For of an existing single dwelling, means the addition of not more than 15% in floor area or 30m², whichever is the lesser. For other habitable development, means the addition of not more than 10% of existing gross floor area. Additions in excess of these criteria are considered a "major" extension / expansion.

Probable Maximum Flood (PMF) - The largest flood that could conceivably occur at a particular location, usually estimated from probable maximum precipitation, coupled with the worst flood producing catchment conditions. The PMF defines the extent of flood prone land, that is, the floodplain. The PMF has been calculated for the Tweed River Floodplain from Byangum and Boat Harbour upstream of Murwillumbah to the river mouth in the Tweed Valley Flood Study 2005. In the Lower Tweed, PMF levels were approximately 1.8m above 100 year ARI flood levels. In Murwillumbah, the difference was approximately 4.4m. PMF levels for other coastal floodplains (Cudgen Creek, Cudgera Creek and Mooball Creek) are yet to be modelled, however in order to implement this Part of the Study in accordance with its Scope (Section 3.2), an assumed interim PMF level 2.0m above 100 year ARI flood level will be used for these other floodplains.

PMF Refuge - A habitable area, being an upper storey, mezzanine level or other refuge located above PMF level, to provide residents of developments without high road access for evacuation with a means of sheltering safely in place until flood waters subside. PMF refuges must be structurally safe and accessible by boat during floods up to the PMF and contain sufficient facilities and supplies to sustain occupants for the expected duration of a PMF.

PMF refuges are a form of high island, isolated from external essential services.

Small Lot Subdivision - Subdivisions where the average lot size, excluding residual and non-residential lots is less than 5000m².

Appendix B - Policy Extracts

NSW FLOODPLAIN DEVELOPMENT MANUAL 2005

Section 1.1.1 Flood Prone Land Policy Statement states that:

The primary objective of the policy is to reduce the impact of flooding and flood liability on individual owners and occupiers of flood prone property, and to reduce private and public losses resulting from flood, utilising ecologically positive methods wherever possible. That is:

- A merit-based approach shall be adopted for all development decisions in the floodplain to take into account social, economic and ecological factors as well as flooding considerations;
- Both mainstream and overland flooding shall be addressed, using the merit based approach in preparation and implementation by councils if strategically generated floodplain risk management plans;
- The impact of flooding and flood liability on existing areas identified in floodplain risk management plans shall be reduced by flood mitigation works and measures, including on-going emergency management measures, the raising of houses where appropriate and development controls; and
- The potential for flood losses in all areas for development or redevelopment shall be contained by the application of ecologically sensitive planning and development controls.

Section G6.2 "Determining Reasonable Flood Related Development Limits" states that:

Indicative flood related development limits can be determined based upon an understanding of the flood behaviour and the impact.... There are certain areas where development would reasonably be excluded:

- Areas where development will have significant adverse impacts on flood behaviour. This may be due to blockage of flood ways (increasing upstream flood levels or redirecting flows) or filling of flood storage areas (increasing downstream peak flood flows or redirecting flows). Assessment involves consideration of the cumulative impacts of proposed new areas on flooding...;
- Areas where flood hazard is too high and cannot effectively be reduced to acceptable levels by management measures. Emergency management is an important consideration as to whether an area is too hazardous for development due to flooding (e.g. islands...); and
- Areas of important flood dependant ecosystems.

Section G6.3 "Flood Compatible Development Within Development Limits" states that:

Within the area where development is considered reasonable from a flood risk perspective, decisions need to be made on controls to support development by reducing flood risk to an acceptable level. This can involve determining:

- The types of development appropriate for the location. This relates to the vulnerability of different types of development and the continuing flood risk to which the area is exposed. For example, an area considered appropriate for general residential development may not be appropriate for aged care accommodation due to the vulnerability of residents....
- An appropriate development density. The cumulative impacts of overall development on flooding or the ability to effectively manage emergency

- response to the area, (perhaps due to evacuation issues...) may limit development density. The management study may also consider options to overcome critical limitations, for example, <u>upgrading external access roads</u> to increase capacity or availability during a flood event.
- Appropriate measures necessary to support development. This involves
 determining appropriate conditions to ensure future development is not
 exposed to an unacceptable level of continuing risk. Conditions.... may
 include measures such as filling of development sites and minimum floor
 levels (FPLs ...) to reduce the likelihood of flooding or special evacuation
 requirements involving improvements to evacuation routes.
- Appropriate management plans for critical infrastructure. New infrastructure should be available and accessible, as necessary, during significant flood events or be able to be re-established readily after an event. This may require flood related design standards to reduce flood vulnerability in the expected conditions. For example, evacuation routes with better drainage can overcome local storm water issues that may otherwise inhibit performance.

Section G7.12 states that:

As the <u>PMF is unlikely to be adopted for protecting development from flooding</u>, a <u>continuing risk remains</u>. This is <u>principally a concern for personal safety</u>, which generally needs to be managed through emergency response and community education.

Section L6.8 Effective Flood Access, states that:

The availability of effective access routes from flood prone areas and developments can directly influence personal danger and potential damage reduction measures.

Effective access means an exit route that remains trafficable for sufficient time to evacuate people and possessions...

Section L6.8 also states that access routes extending beyond the floodplain are to be considered. Access routes "do not have to be above the PMF level but be at a level of flood protection that, in combination with effective warning time, development type and flood duration, provides adequate time for evacuation and reduces risk to acceptable levels. Without such access, the risk to personal safety of the entrapped and their rescuers may be unacceptable."

Section L6.8 goes on to state that

"All weather vehicular access is the preferred method of reducing flood risk with pedestrian access being problematic due to the movement of aged, children and disabled."

Council's Local Flood Risk Management Policy, as discussed in Section 3.5.6 of this study, has been developed with reference to Sections C9 and I6 of the FPDM:

C9 Controlling Development During the Management Process ...<u>it is important for councils to control development during the preparation of management plans and associated background studies</u>. In this regard councils need to:

- undertake development control based upon current knowledge of the flood behaviour and hazard;
- improve knowledge of flood behaviour and hazard through the management process; and

• manage flood risk to future land use strategically considering the full range of flood risk, as this information becomes available.

During the management process, <u>a local flood risk management policy consistent</u> with the principles of the manual (Section I.6) can help councils to control development whilst the management plan is completed...The policy can be updated during the process to reflect the improved knowledge and the higher degree of information available, and incorporate any management decisions made by council during this period...

SECTION 117 MINISTERIAL DIRECTION NO.15 – FLOOD PRONE LAND (30 SEPTEMBER 2005)

As revised by Planning Circular PS 07-003, 31 January 2007 (revisions are underlined):

Objective

- To ensure that development of flood prone land is consistent with the NSW Government's Flood Prone Land Policy and the principles of the Floodplain Development Manual, 2005.
- To ensure that the provisions of an LEP on flood prone land is commensurate with flood hazard and includes consideration of the potential flood impacts both on and off the subject land.

Where this direction applies

This direction applies to all councils that contain flood prone land within their LGA.

When this direction applies

This direction applies when a council prepares a draft LEP that creates, removes or alters a zone or a provision that affects flood prone land.

What a council must do if this direction applies

- (1) A draft LEP shall include provisions that give effect to and are consistent with the NSW Flood Prone Land Policy and the principles of the Floodplain Development Manual, 2005 (including the *Guideline on Development Controls on Low Flood Risk Areas*).
- (2) A draft LEP shall not rezone land within the flood planning areas from Special Area, Recreation, Rural or Environmental Protection Zones to a Residential, Business, Industrial or Special Area Zone.
- (3) A draft LEP shall not contain provisions that apply to the flood planning areas which:
 - (a) permit development in floodway areas,
 - (b) permit development that will result in significant flood impacts to other properties,
 - (c) permit a significant increase in the development of that land,
 - (d) are likely to result in a substantially increased requirement for government spending on flood mitigation measures, infrastructure or services, or
 - (e) permit development to be carried out without development consent except for the purposes of agriculture (not including dams, drainage canals, levees, buildings or structures in floodways or high hazard areas) or exempt development.

- (4) A draft LEP must not impose flood related development controls above the residential flood planning level for residential development on land, unless a council provides adequate justification for those controls to the satisfaction of the Director-General (or an officer of the Department nominated by the Director-General).
- (5) For the purposes of a draft LEP, a council must not determine a flood planning level that is inconsistent with the Floodplain Development Manual 2005 (including the Guideline on Development Controls on Low Flood Risk Areas) unless a council provides adequate justification for the proposed departure from that Manual to the satisfaction of the Director-General (or an officer of the Department nominated by the Director-General).
- (6) A draft LEP may be inconsistent with this direction only if council can satisfy the Director-General (or an officer of the Department nominated by the Director-General) that any particular provision or area should be varied or excluded having regard to the provisions of section 5 of the Environmental Planning and Assessment Act, and
 - (a) the rezoning is in accordance with a floodplain risk management plan prepared in accordance with the principles and guidelines of the Floodplain Development Manual, 2005, or
 - (b) the rezoning is, in the opinion of the Director-General (or an officer of the Department nominated by the Director-General), of a minor significance.

TWEED LOCAL ENVIRONMENT PLAN 2000

LEP2000 Clause 34 Flooding states that:

- (1) Objectives
- to minimise future potential flood damage by ensuring that only appropriate compatible development occurs on flood liable land.
- to minimise the adverse effect of flooding on the community.
- (2) Where, in the consent authority's opinion, land is likely to be subject to flooding, then it must not grant consent to development on that land unless it has considered:
- (a) the extent and nature of the flooding hazard affecting the land, and
- (b) whether or not the development would increase the risk or severity of flooding of other land in the vicinity, and
- (c) whether the risk or severity of flooding affecting the development could be reasonably mitigated, and
- (d) the impact of the development on emergency services, and
- (e) the provisions of Section A3 Development of Flood Liable Land of Tweed Development Control Plan."

There are also a number of other clauses in the LEP2000 that refer to other aspects of development control where flooding is an issue. These include:

- Schedule 1 design flood level impact on definition of "finished ground level"
- Clause 10 impact on complying development
- Various clauses relating to specific land parcels

TWEED SHIRE DEVELOPMENT CONTROL PLAN, SECTION A3 - DEVELOPMENT OF FLOOD LIABLE LAND

Section A3.2.1 of the DCP states that:

Residents in flood prone areas should be very conscious of their situation, be alert during periods of predicted high rainfall and be prepared to evacuate all possessions that are located on land liable to flooding

Appendix C - Options Analysis for Assessment Criteria for TLEP Amendments

	FLOOD RISK MANAGEMENT OPTIONS				
	EVACUATION	SHELTER IN PLACE	RESCUE		
LAND CLASSIFICATION	Residents relocate to flood free areas as flood levels rise above design flood level for local roads and dwellings.	Residents remain in situ for duration of the flood emergency.	Relies on emergency services to remove residents from the flood risk for events that cut local access routes.		
Land Type 1 - High Islands	Not applicable. Light islands assuids a fleed free destination for exercises from	 High islands may or may not be serviced by critical infrastructure such as hospitals. 	Not applicable.		
Land is above PMF level	 High islands provide a flood free destination for evacuees from other areas. 	 Flood free land is suitable for rezoning for habitable uses 			
PREFERRED OPTION	 Permit applications for TLEP Amendments on Land Type 1 - 	High Islands for habitable land use			
Land Type 2a - Flood Free Access (Natural) Topography naturally grades to land that is	 Evacuation efficiency is dependant upon mode of transport (road or pedestrian evacuation), services available at the destination (evacuation centre, medical facilities), and ability of residents to 	 Unless buildings in this zone have a refuge (eg. additional storey) above PMF level, occupants are unable to remain in situ safely for floods up to the PMF. 	Places safety of rescuers and those being rescued at high risk.		
above PMF level	travel (aged, infirmed, disabled, young children).	 Large number of refuges in new residential areas are not considered suitable, due to increased building costs, isolation of large numbers of occupants, and access difficulties for emergency services for resupply or emergency evacuation of occupants (eg medical emergency). Evacuation of occupants is therefore preferred risk management option. 	This is contrary to the TLEP and the FPDM and is not an acceptable risk management approach.		
PREFERRED OPTION	 Permit applications for TLEP Amendments on Land Type 2(a 	a) - Flood Free Access (Natural) for habitable land use			
Land Type 2b - Flood Free Access (Engineered) Land is linked to land above PMF level by fill, roads, bridges and the like	 As for Land Type 2(a) Provision of engineered access will typically increase land development costs, compared to "low island" development. 	As for Land Type 2(a)	As for Land Type 2(a)		
PREFERRED OPTION	Pormit applications for TLEP Amondments on Land Type 2/	a) - Flood Froe Access (Engineered) for habitable land use			
Land Type 3 - Low Islands Land and dwellings are constructed at design flood level but below PMF level, with no flood free access to land above PMF level PREFERRED OPTION	 Permit applications for TLEP Amendments on Land Type 2(Interpretation of the Evacuation can only occur prior to local roads being inundated by flood waters. Relies heavily on adequate warning times, education and community response to warnings, which the FPDM does not support. Those who do not evacuate require rescue by emergency services. Exclude applications for TLEP Amendments on Land Type 3 	 Low island developments have no provision for refuge above the FPL up to the PMF. This makes it unsafe for occupants to shelter in place during floods exceeding the FPL, requiring rescue as evacuation routes are already inundated. 	 Places safety of rescuers and those being rescued at high risk. This is contrary to the TLEP and the FPDM and is not an acceptable risk management approach. 		

Appendix D - Options Analysis for Habitable Land Use Development Controls

	FLOOD RISK MANAGEMENT OPTIONS			IS
LAND USE RISK CLASS	AVOIDANCE Mandate development to be above the PMF, on flood free land.	EVACUATION Mandate development to have natural or engineered road access to land above PMF for relocation of occupants above flood level.	SHELTER IN PLACE Development is required to have a habitable refuge capable of accommodating and servicing the needs of in-situ occupants above the PMF so that they can "wait out" the flood event for its duration.	RESCUE No habitable areas within the development are located above the PMF level and occupants require rescue by emergency services to relocate them to land above PMF level.
(a) Critical Infrastructure and Emergency Response Facilities As per Appendix K3.1 of the FPDM - Police and ambulance stations, hospitals, SES headquarters, evacuation centres and civil infrastructure such as major telephone exchanges and power sub-stations.	Ensures critical infrastructure and emergency response facilities remain operable for all floods up to the PMF. Consistent with FPDM recommendati ons and DoP Guideline Facilities may be isolated from sections of existing communities, including staff. A requirement for high road access will sterilize many otherwise suitable sites.	Critical facilities are expected to provide support to evacuees and emergency personnel, so evacuation of these facilities is not considered acceptable.	 Critical facilities must be accessible during large floods, so this option can only be applicable if located on land above PMF (i.e. avoidance). Many existing facilities are located below PMF, so need to apply provisions for extensions and upgrades relying on shelter in place option: 50% of all additional floor areas must be above the PMF to provide emergency refuge. Refuge areas must be able to cater for needs of occupants. Building height limits may apply. Flood Response Assessment Plans required with DA. 	Not supported by FPDM Critical facilities are expected to provide support to rescuers and those being rescued.

	FLO	FLOOD RISK MANAGEMENT OPTIONS				
	AVOIDANCE	EVACUATION	SHELTER IN PLACE	RESCUE		
	Mandate development to be above the PMF, on flood free land.	Mandate development to have natural or engineered road access to land above PMF for relocation of occupants above flood level.	Development is required to have a habitable refuge capable of accommodating and servicing the needs of in-situ occupants above the PMF so that they can "wait out"	No habitable areas within the development are located above the PMF level and occupants require rescue by emergency services to		
LAND USE RISK CLASS			the flood event for its duration.	relocate them to land above PMF level.		
PREFERRED OPTIONS	 Mandate all new critical infrastructure and facilities to be located above PMF, unless exceptional circumstances can be justified. Permit minor expansion of existing facilities without consideration of PMF. Major expansion below PMF subject to provision of adequate PMF refuge. 					

development to be above the PMF, on flood free land. LAND USE RISK CLASS (b) Sensitive Uses Housing (including group homes) and care facilities for seniors and disabled persons. • Ensures that no evacuation is necessary during a flood event. • May still be isolated from critical services e.g. hospitals. • Prevents any new development below PMF, which is considered too restrictive and unnecessarily sterilizes otherwise suitable land. • Mandated avoidance is not supported by FPDM. development to have natural or engineered road access to land above PMF for relocation of occupants above the PMF so that they can "wait out" the flood event for its duration. be recommodating and servicing accommodatin gand servicing accommodatin gand servicing occupants offsite, reducing needs of services and those one occupants one low road acter for high needs patients. Refer sotherwise suitable land. • Mandated avoidance is not supported by FPDM. **Devents and the vent of the proposed occupants one clow road accesses are incundated. • The vent of the vent occupants one clow road accesses are inventive occupants one ded once one reded once one elements etc. • Flood **The vent occupants occupants occupants one of the vent occupants one occupants occupants one occupants occupants one o		FLC	OOD RISK MANA	GEMENT OPTION	vs
LAND USE RISK CLASS (b) Sensitive Uses Housing (including group homes) and care facilities for seniors and disabled persons. • Ensures that no evacuation is necessary during a flood event. • May still be isolated from critical services e.g. hospitals. • Prevents any new development below PMF, which is considered too restrictive and unnecessarily sterilizes otherwise suitable land. • Mandated avoidance is not supported by FPDM. • Ensures that no evacuation is necessary during a flood event. • Mandated avoidance is not supported by FPDM. • Ensures that no evacuation is necessary during a flood event. • Connection by high road to land above evacuating, accommodatin ensure road evacuation is possible for all occupants offsite, reducing stress on high risk patients. • Limited emergency evacuation destinations available to cater for high needs patients. Refer SES Tweed avoidance is not supported by FPDM. • Mandated avoidance is rot supported by FPDM. • In some cases, relocation of sensitive occupants at greater risk due to stress, exposure to elements etc. • Flood • Connection by high road to land above evacuating, accommodatin ensure road evacuation go occupants of its duration. • Not supported by FPDM supported by FPDM evacuation of sensitive occupants and placed at risk. • Ensures that no evacuation bing needs of occupants offsite, reducing stress on high risk patients. • Ensures that no evacuation of sensitive services and those evacuation accommodatin ensure road evacuation is needs of occupants offsite, reducing stress on high risk patients. • Ensures that no evacuation of sensitive services and those occupants offsite, reducing risk patients. • Ensures that no evacuation of sensitive services and those occupants offsite, reducing risk patients. • Ensures that no evacuation of sensitive services and those occupants offsite, reducing risk patients. • Ensures that na above evacuation of sensitive services and those occupants of sensitive services and those occupants of services and servicing ne		Mandate development to be above the PMF,	Mandate development to have natural or engineered road access to land above PMF for	PLACE Development is required to have a habitable refuge capable of accommodating and servicing the	No habitable areas within the development are located above the PMF level and
(b) Sensitive Uses Housing (including group homes) and care facilities for seniors and disabled persons. • Ensures that no evacuation is necessary during a flood event. • May still be isolated from critical services e.g. hospitals. • Prevents any new development below PMF, which is considered too restrictive and unnecessarily sterilizes otherwise suitable land. • Mandated avoidance is not supported by FPDM. • Ensures that no evacuation by high road to land above PMF will evacuation is possible for all occupants offsite, reducing stress on high risk patients. • Access problems for additional staff once low road accesses are inundated. • Mandated avoidance is not supported by FPDM. • Ensures that no evacuation by high road to land above evacuating, accommodatin supported of evacuation is possible for all occupants offsite, reducing stress on high risk patients. • Access problems for additional staff once low road accesses are inundated. • Mandated avoidance is not supported by FPDM. • In some cases, relocation of sensitive occupants of sheltering occupants of evacuation of sheltering occupants occupants at greater risk due to stress, exposure to elements etc. • Flood			occupants above	occupants above the PMF so that they can "wait out" the flood event for	require rescue by emergency services to relocate them to land above
Assessment Plans required with DA • Effective evacuation relies heavily on early warning systems and community education • Provision of high level evacuation routes for routes for routes for required food and medical delivery services for many existing facilities. Many existing facilities are located between 100 year ARI and PMF floods and are isolated by road in large	Housing (including group homes) and care facilities for seniors and	no evacuation is necessary during a flood event. May still be isolated from critical services e.g. hospitals. Prevents any new development below PMF, which is considered too restrictive and unnecessarily sterilizes otherwise suitable land. Mandated avoidance is not supported	high road to land above PMF will ensure road evacuation is possible for all occupants during large floods. Limited emergency evacuation destinations available to cater for high needs patients. Refer SES Tweed Flood Plan. In some cases, relocation of sensitive occupants may place them at greater risk due to stress, exposure to elements etc. Flood Response Assessment Plans required with DA Effective evacuation relies heavily on early warning systems and community education Provision of high level evacuation routes for sensitive facilities is	complexity of evacuating, accommodatin g and servicing needs of occupants offsite, reducing stress on high risk patients. Access problems for additional staff once low road accesses are inundated. Access problems for emergency services if evacuation of sheltering occupants (e.g. medical emergency) is needed once low road accesses are inundated. Incompatible with current food and medical delivery services for many existing facilities. Many existing facilities are located between 100 year ARI and PMF floods and are isolated by road in large floods, so	 Not supported by FPDM Rescuers and those being rescued are placed at risk. Emergency services are generally not equipped to rescue large numbers of high risk patients Rescue operations place sensitive occupants at greater risk due to stress, exposure to elements

DoP Guideline

provisions for

	FLOOD RISK MANAGEMENT OPTIONS			
	AVOIDANCE	EVACUATION	SHELTER IN PLACE	RESCUE
LAND USE RISK CLASS	Mandate development to be above the PMF, on flood free land.	Mandate development to have natural or engineered road access to land above PMF for relocation of occupants above flood level.	Development is required to have a habitable refuge capable of accommodating and servicing the needs of in-situ occupants above the PMF so that they can "wait out" the flood event for its duration.	No habitable areas within the development are located above the PMF level and occupants require rescue by emergency services to relocate them to land above PMF level.
PREFERRED OPTIONS	 Mandate all new sensitive development to have permanent high level road evacuation route(s) to land above PMF level and/or adequate PMF refuge, subject to the recommendations of an acceptable Flood Response Assessment Plan. Permit minor expansion of existing facilities without consideration of PMF. Major expansion below PMF subject to provision of adequate PMF refuge. 			

continued over - 1 of 3

	FLOOD RISK MANAGEMENT OPTIONS			
	AVOIDANCE	EVACUATION	SHELTER IN PLACE	RESCUE
LAND USE RISK CLASS	Mandate development to be above the PMF, on flood free land.	Mandate development to have natural or engineered road access to land above PMF for relocation of occupants above flood level.	Development is required to have a habitable refuge capable of accommodating and servicing the needs of in-situ occupants above the PMF so that they can "wait out" the flood event for its duration.	No habitable areas within the development are located above the PMF level and occupants require rescue by emergency services to relocate them to land above PMF level.
(c) Medium and High Density Accommodation (i) Multi dwelling housing, dual occupancy, residential accommodation, residential flat building, backpackers' accommodation, boarding house, hostel, hotel accommodation, serviced apartment, tourist and visitor accommodation, and accommodation associated with an educational establishment	May still be isolated from critical services e.g. hospitals. Prevents any new development below PMF, which is considered too restrictive and unnecessarily sterilizes otherwise suitable land. Mandated avoidance is not supported by FPDM.	 Connection by high road to land above PMF will ensure road evacuation is possible for all occupants for large floods. Mandating evacuation via high road considered too restrictive and unnecessarily sterilizes otherwise suitable land. Limited emergency evacuation destinations able to cater for occupants. Refer SES Tweed Flood Plan. Flood Response Assessment Plans required with DA Effective evacuation relies heavily on early warning systems and community education May not comply with DoP Guideline, requiring DECC & DoP concurrence. 	 Reduces complexity of evacuating, accommodatin g and servicing needs of occupants offsite Access problems for emergency services if evacuation of sheltering occupants (e.g. medical emergency) is needed once low road accesses are inundated, but risks are less than sensitive land use class, and considered acceptable. Many existing facilities are located between 100 year ARI and PMF floods and are isolated by road in large floods, so need to apply provisions for extensions and upgrades relying on shelter in place option: All additional habitable floor areas must be connected internally to floor areas 	Not supported by FPDM Rescuers and those being rescued are placed at risk. 39

above the

	FLOOD RISK MANAGEMENT OPTIONS			
	AVOIDANCE	EVACUATION	SHELTER IN PLACE	RESCUE
LAND USE RISK CLASS	Mandate development to be above the PMF, on flood free land.	Mandate development to have natural or engineered road access to land above PMF for relocation of occupants above flood level.	Development is required to have a habitable refuge capable of accommodating and servicing the needs of in-situ occupants above the PMF so that they can "wait out" the flood event for its duration.	No habitable areas within the development are located above the PMF level and occupants require rescue by emergency services to relocate them to land above PMF level.
PREFERRED OPTIONS	 Mandate all new high/medium density development to have permanent high level road evacuation route(s) to land above PMF level and/or adequate PMF refuge, subject to the recommendations of an acceptable Flood Response Assessment Plan. Permit minor expansion of existing facilities without consideration of PMF. Major expansion below PMF subject to provision of adequate PMF refuge 			

	FLOOD RISK MANAGEMENT OPTIONS			
LAND USE RISK CLASS	AVOIDANCE Mandate development to be above the PMF, on flood free land.	Mandate development to have natural or engineered road access to land above PMF for relocation of occupants above flood level.	SHELTER IN PLACE Development is required to have a habitable refuge capable of accommodating and servicing the needs of in-situ occupants above the PMF so that they can "wait out" the flood event for its duration.	RESCUE No habitable areas within the development are located above the PMF level and occupants require rescue by emergency services to relocate them to land above PMF level.
(c) Medium and High Density Accommodation (ii) Moveable dwellings, caravan parks	May still be isolated from critical services e.g. hospitals. Prevents any new development below PMF, which is considered too restrictive and unnecessarily sterilizes otherwise suitable land. Mandated avoidance is not supported by FPDM.	 Connection by high road to land above PMF will ensure road evacuation is possible for all occupants for large floods. Short term occupants are generally highly mobile and can readily relocate to high land. Are relatively self sufficient while mobile with little reliance on emergency support. Effective evacuation relies on early warning systems and appropriate notification measures by facility management. Flood Response Assessment Plans required with DA Prevents any new development or expansion of existing facilities not connected by high road to land above PMF, or benefiting from high land within the site. This is 	Difficult to manage temporary occupants with no knowledge of flood risks. Management are unable to predict all emergency needs for future occupants, to provide suitably equipped shelter. Access problems for emergency services if evacuation of sheltering occupants (e.g. medical emergency) is needed once low road accesses are inundated. May conflict with building height limits.	Not supported by FPDM Rescuers and those being rescued are placed at risk. 41

the site. This is

	FLOOD RISK MANAGEMENT OPTIONS			
	AVOIDANCE	EVACUATION	SHELTER IN PLACE	RESCUE
	Mandate development to be above the PMF, on flood free land.	Mandate development to have natural or engineered road access to land above PMF for relocation of occupants above flood level.	Development is required to have a habitable refuge capable of accommodating and servicing the needs of in-situ occupants above the PMF so that they can "wait out"	No habitable areas within the development are located above the PMF level and occupants require rescue by emergency services to
LAND USE RISK CLASS			the flood event for its duration.	relocate them to land above PMF level.
PREFERRED OPTIONS	 Mandate all new caravan/moveable dwelling parks to have permanent high level road evacuation route(s) to land above PMF level. No expansion of existing facilities permitted, unless permanent high level road evacuation route to high land external to the site is available, or high land internal to the site can be accessed by the additional sites via high level road and/or pedestrian routes. 			

continued over - 2 of 3

	FLC	OOD RISK MANA	GEMENT OPTION	IS
	AVOIDANCE Mandate	EVACUATION Mandate	SHELTER IN PLACE Development is	RESCUE No habitable
LAND USE RISK CLASS	development to be above the PMF, on flood free land.	development to have natural or engineered road access to land above PMF for relocation of occupants above flood level.	required to have a habitable refuge capable of accommodating and servicing the needs of in-situ occupants above the PMF so that they can "wait out" the flood event for its duration.	areas within the development are located above the PMF level and occupants require rescue by emergency services to relocate them to land above
(d) Residential Subdivision and Development Urban Residential Subdivision (including small lot rural subdivision) Urban Residential Dwellings Rural Subdivision Rural Residential Dwellings	May still be isolated from critical services e.g. hospitals. Prevents any new development below PMF, which is considered too restrictive and unnecessarily sterilizes otherwise suitable land. Mandated avoidance is not supported by FPDM.	Connection by high road to land above PMF will ensure road evacuation is possible for all occupants for large floods. Mandating subdivision roads above 100 year ARI flood level (including stormwater overland flow paths) will increase filling requirements for subdivision developers, increasing land costs. Increased filling and high level roads provide more efficient urban stormwater systems, reducing stormwater systems, reducing stormwater flash flooding. Filling requirements are reduced if flood free pedestrian accesses are mandated for subdivision	Reduces complexity of evacuating, accommodatin g and servicing needs of occupants offsite Frees up land for residential development that would otherwise be sterilized should evacuation be mandated as the sole risk response - more efficient land use to cater for future growth. In large subdivisions, potential for significantly greater numbers of dwelling occupants sheltering in place during large floods. Creates access problems for emergency services if evacuation of sheltering occupants (e.g. medical)	PMF level. Not supported by FPDM Rescuers and those being rescued are placed at risk.
		design. Relies on the mobility of residents (e.g. children, aged), so pedestrian connection to high road should not	emergency) is needed once low roads are inundated. Not considered acceptable for large, new subdivisions, particularly	43

	FLOOD RISK MANAGEMENT OPTIONS			
	AVOIDANCE	EVACUATION	SHELTER IN PLACE	RESCUE
LAND USE RISK CLASS	Mandate development to be above the PMF, on flood free land.	Mandate development to have natural or engineered road access to land above PMF for relocation of occupants above flood level.	Development is required to have a habitable refuge capable of accommodating and servicing the needs of in-situ occupants above the PMF so that they can "wait out" the flood event for its duration.	No habitable areas within the development are located above the PMF level and occupants require rescue by emergency services to relocate them to land above
PREFERRED OPTIONS	 Mandate all new subdivisions to have high level road evacuation route(s) to land above PMF level, accessible to all allotments via (as a minimum) flood free pedestrian accesses not exceeding 100m in length. Permit infill subdivision subject to the creation of covenants on land titles of all new allotments that cannot achieve suitable high level road/pedestrian evacuation route(s) to land above PMF level, requiring adequate PMF refuges in all future dwellings. Mandate adequate PMF refuges in all new dwellings on existing allotments that are located below PMF level and that are without suitable high level road/pedestrian evacuation route(s) to land above PMF level, unless that land is protected by a 1 in 100 year levee (Murwillumbah CBD, East Murwillumbah, Dorothy/William Street). Minor extensions to existing dwellings permitted without consideration of the PMF. Dwellings undergoing major extensions must meet new single dwelling criteria. 			

3 of 3

